


## CU/XLPE/LSZH/DSTA/LSZH (Multi - Cores)

XLPE Insulated, LSZH Bedded, Double Steel Tape Armoured, LSZH Sheathed Cable

### Application

These power cable for fixed installations such as distribution networks or industrial installations. Such as Plant engineering; Industrial machinery; Heating and air-conditioning systems; Power stations; Stage applications etc. Armoured cable suitable for direct burial.

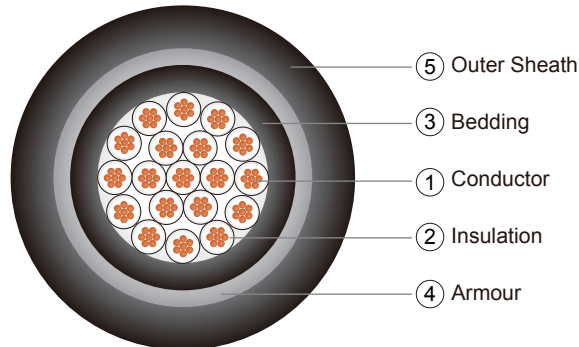

### Construction

① Conductor: Plain annealed copper, class1 solid or class 2 stranded acc. to IEC 60228. Flexible class 5 or tinned conductor could be offer upon request.

② Insulation: Cross-linked polyethylene (XLPE) compound as per IEC 60502-1.  
Insulation Color Code:

Number of Cores	Color Code to IEC 60502-1	Color Code to BS 5467
6 and above	White with Black Numbering or Others	White with Black Numbering or Others

Assembly: Cores cabled together with PP filler and covered with non-woven tape.

③ Bedding: Low smoke zero halogen (LSZH) compound type ST8 (90°C) of IEC 60502-1.  
Bedding Colour: Black or other color as per customer request.

④ Armour: Double steel tape armoured (DSTA).

⑤ Outer Sheath: Low smoke zero halogen (LSZH) compound type ST8 (90°C) of IEC 60502-1.  
Outer Sheath Color: Black or other color as per customer request.

### Electrical Characteristics

Recommended rated voltages  $U_0$

Highest system voltage ( $U_m$ ) (kV)	Rated voltage ( $U_0$ ) (kV)	
	Categories A and B	Category C
1,2	0,6	0,6

Routine test voltages

Rated voltage $U_0$ (kV)	0,6
Test voltage (kV)	3,5

Maximum conductor temperatures for different types of insulating compound

Maximum conductor temperature (°C)	
Normal operation	Short-circuit (5 s maximum duration)
90	250

Operating Temperature: -15°C to 90°C

Test Voltage: 3.5 kV for 5 minutes

### Installation Reference

Min.Bending Radius (mm): 8 x cable overall diameter

Max.Pulling Tension (N/mm<sup>2</sup>): 70

## CU/XLPE/LSZH/DSTA/LSZH (Multi - Cores)

XLPE Insulated, LSZH Bedded, Double Steel Tape Armoured, LSZH Sheathed Cable

### Reference Standards

Design Specification: BS6724

Conductor: IEC60228, BS EN60228

Flame Retardancy: IEC60332-3-22, BS EN60332-3-22

Low Smoke Zero Halogen: IEC61034-2, BS EN61034-2, IEC60754-1, IEC60754-2, BS EN50267-2-1, BS EN50267-2-2

### Dimension

No. of Cores	Nominal Conductor Area (mm <sup>2</sup> )	No. and Diameter of Wires (no./mm)	Thickness of Insulation (mm)	Thickness of Bedding (mm)	Diameter Under Armour (mm)	Thickness of Armour Tape (mm)	Thickness of Sheath (mm)	Overall Diameter (mm)	Approximate Weight (kg/km)
5	1.5	7/0.53	0.6	1.0	10.1	0.2	1.8	14.5	373
7		7/0.53	0.6	1.0	11.0	0.2	1.8	15.4	438
10		7/0.53	0.6	1.0	14.0	0.2	1.8	18.4	575
12		7/0.53	0.6	1.0	14.4	0.2	1.8	18.8	629
19		7/0.53	0.6	1.0	17.0	0.2	1.8	21.4	840
20		7/0.53	0.6	1.0	17.4	0.2	1.8	21.8	872
24		7/0.53	0.6	1.0	19.9	0.2	1.8	24.3	1019
37		7/0.53	0.6	1.0	22.9	0.2	1.8	27.3	1370
5	2.5	7/0.67	0.7	1.0	11.2	0.2	1.8	15.6	453
7		7/0.67	0.7	1.0	12.2	0.2	1.8	16.6	542
10		7/0.67	0.7	1.0	15.6	0.2	1.8	20.0	720
12		7/0.67	0.7	1.0	16.2	0.2	1.8	20.6	796
19		7/0.67	0.7	1.0	19.1	0.2	1.8	23.5	1090
20		7/0.67	0.7	1.0	19.6	0.2	1.8	24.0	1134
24		7/0.67	0.7	1.0	22.5	0.2	1.8	26.9	1332
37		7/0.67	0.7	1.2	26.3	0.2	1.9	30.9	1879
5	4	7/0.85	0.7	1.0	12.7	0.2	1.8	17.1	572
7		7/0.85	0.7	1.0	13.9	0.2	1.8	18.3	698
10		7/0.85	0.7	1.0	17.8	0.2	1.8	22.2	939
12		7/0.85	0.7	1.0	18.4	0.2	1.8	22.8	1051
19		7/0.85	0.7	1.0	21.8	0.2	1.8	26.2	1472
20		7/0.85	0.7	1.0	22.4	0.2	1.8	26.8	1535
24		7/0.85	0.7	1.0	25.7	0.2	1.8	30.1	1811
37		7/0.85	0.7	1.2	30.1	0.5	1.8	35.7	3059