


HDT

Application

These cables are designed for automotive applications requiring extra protection against physical threats. They are often used as surface wiring in a variety of vehicles, including cars, trucks, RVs, and buses.

Standards/Specification

SAE J 1128

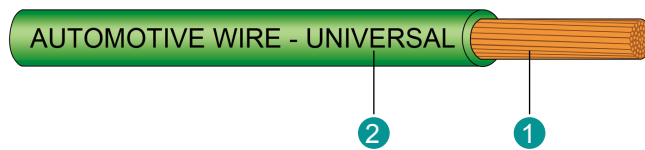

Construction

- ① Conductor: Bare stranded copper
- ② Insulation: Polyvinylchloride (PVC)

Product Features

Voltage rating: 60 V

Temperature range: -40°C to + 85°C (3000 h)

Technical Data

AGW	Stranding	Insulation Wall	O.D.	Net Weight 1000ft
20	7x28	0.04	0.01	8.6
18	16x30	0.04	0.01	11
16	19x29	0.04	0.14	11.5
14	19x27	0.04	0.16	16.8
12	19x25	0.05	0.17	25.2
10	19x23	0.05	0.21	40