




FLRYW125YW

Application:

Connecting cable for cars and other vehicles. Improved properties at crimping of cores together with usage of melted plastic material.

Standards/Specification:

ISO6722

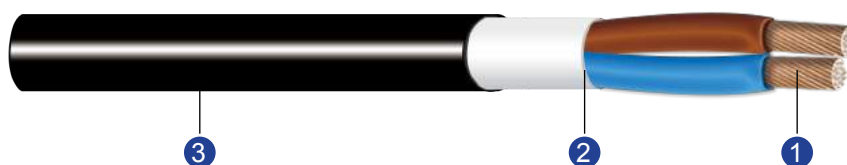

Construction:

- 1 Conductor: Soft-annealed electrolytic copper Cu-ETP1 according to DIN EN 13602, bare or tinned. Conductor construction according to ISO 6722.
- 2 Insulation: 125°C PVC
- 3 Sheath: 105°C PVC



Product Features:

Voltage rating: 60 V

Temperature range: -40 °C to +105 °C (3000 h)

Technical Data:

Nominal Cross-Section (mm ²)	Strand No./Max. Diameter (N/mm)	Max. Diameter of Conductor (mm)	Nominal Insulation Thickness (mm)	Thickness of sheath (mm)	Max. Overall Diameter (mm)	Conductor Resistance (20°C Ω/km)	Weight Approx. (kg/km)
2×0.5	19/0.19	1.6	0.28	0.35	4.5	37.1	29