


FLYZ

Application:

These two core figure 8 speaker cable are ideal for auto loudspeaker connection.

Standards/Specification:

ISO 6722, DIN 72551-6

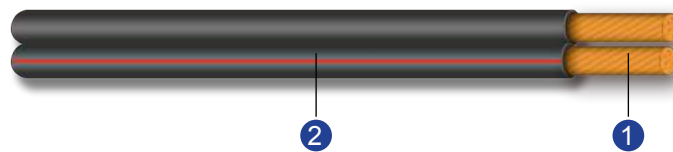

Construction:

- 1 Conductor: Soft-annealed electrolytic copper Cu-ETP1 according to DIN EN 13602, bare or tinned. Conductor construction according to ISO 6722.
- 2 Insulation: PVC insulation Class B to ISO 6722 (lead free). Core identification: -black-black/white, black-black/red, black-black/blue or transparent with coloured trace.

Product Features:

Voltage rating: 60 V d.c, 25 V a.c.
 Temperature range: -40 °C to +105 °C (3000 h)
 UV-resistant
 Resistant to most oils, weather and chemicals



Technical Data:

Nominal Cross-Section (mm ²)	Strand No./Max. Diameter (N/mm)	Max. Diameter of Conductor (mm)	Nominal Insulation Thickness (mm)	Max. Overall Diameter (mm)	Max. Conductor Resistance (20°C Ω/km)	Weight Approx. (kg/km)
2×0.5	16/0.21	1.1	0.6	4.6×2.30	37.1	15
2×0.75	24/0.21	1.3	0.6	5.3×2.7	24.7	23
2×1.5	30/0.26	1.8	0.6	6.0×3.0	12.7	39