


**Multipair Overall Screened Cables-Belden
Equivalent 9260**

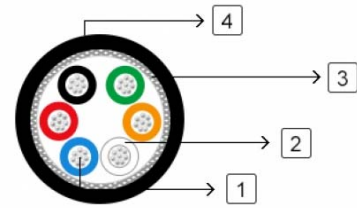

Applications	These multicore overall screened cables have individually insulated cores laid up in a tinned copper braid screen, suitable for used as control cables.
Construction	
Conductor	Tinned copper wire.
Insulation	PVC
Overall Screen	Tinned copper braid, 85% coverage.
Drain Wire	Stranded Tinned Copper.
Sheath	PVC (V type)/LSZH (H type).
Insulation Colour	Black, White, Red, Green, Orange, Blue, White/Black, Red/Black, Green/ Black, Orange/Black, Blue/Black, Black/White.

Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2464
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	85
Nominal Capacitance Conductor to Screen	pF/m	187
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

Dimensions

Part No.	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
----------	--------------	----------------------	------------------	------------------

		mm	mm	mm
UEBE 9261V	12	0.41	1.02	10.1
UEBE 9261H	12	0.41	1.02	10.1