


**Multipair Overall Screened Cables-Belden
Equivalent 9261**

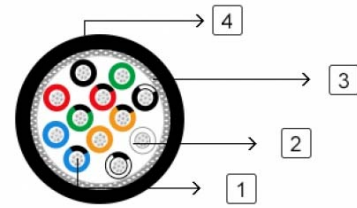

Applications	These multicore overall screened cables have individually insulated cores laid up in a tinned copper braid screen, suitable for used as control cables.		
Construction			
Conductor	Tinned copper wire.		
Insulation	PVC		
Overall Screen	Tinned copper braid, 85% coverage.		
Sheath	PVC (V type)/LSZH (H type).		
Insulation Colour	Black, White, Red, Green, Orange, Blue.		
Electrical & Mechanical Characteristics			
AWG			20
Conductor Construction			7x0.32
UL Style			2464
Maximum Conductor Resistance	Ω/km		34.1
Voltage Rating	V		300
Nominal Capacitance Conductor to Conductor	pF/m		85
Nominal Capacitance Conductor to Screen	pF/m		164
Bending Radius			10xOverall Diameter
Operating Temperature	$^{\circ}\text{C}$		-20~80

Dimensions

Part No.	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 9260V	6	0.41	0.81	7.8

UEBE 9260H	6	0.41	0.81	7.8
------------	---	------	------	-----