


**Multipair Overall Screened Cables-Belden
Equivalent 8729**

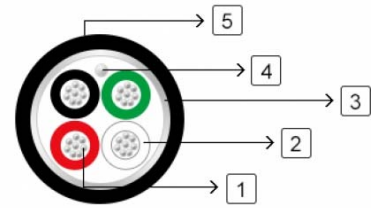

Applications These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a drain wire. These cables are suitable for used as audio, control and instrumentation cables.

Construction	
Conductor	Tinned copper wire.
Insulation	PE
Overall Screen	Tinned copper braid, 85% coverage.
Drain Wire	Tinned copper covered steel.
Sheath	PVC (V type)/LSZH (H type).
Insulation Colour	Black, Red, Green, Clear.

Electrical & Mechanical Characteristics		
AWG		22
Conductor Construction		19x0.16
UL Style		2094
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	72
Nominal Capacitance Conductor to Screen	pF/m	138
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~75

Dimensions

Part No.	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 8729V	4	0.41	1.30	6.5
UEBE 8729H	4	0.41	1.30	6.5