


**Multipair Overall Screened Cables-Belden
Equivalent 8772**

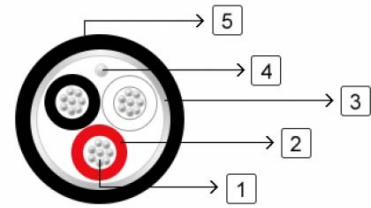

Applications	These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.		
Construction			
Conductor	Tinned copper wire.		
Insulation	PE		
Overall Screen	Aluminium/Polyester tape.		
Drain Wire	Tinned copper wire.		
Sheath	PVC (V type)/LSZH (H type).		
Insulation Colour	Black, Red, Clear.		
Electrical & Mechanical Characteristics			
AWG			20
Conductor Construction			7x0.32
UL Style			2093
Maximum Conductor Resistance	Ω/km		34.1
Voltage Rating	V		300
Nominal Capacitance Conductor to Conductor	pF/m		89
Nominal Capacitance Conductor to Screen	pF/m		167
Bending Radius			10xOverall Diameter
Operating Temperature	$^{\circ}\text{C}$		-20~60

Dimensions

Part No.	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 8772V	3	0.41	0.84	5.5
UEBE 8772H	3	0.41	0.84	5.5