


**Multipair Overall Screened Cables-Belden
Equivalent 9508**

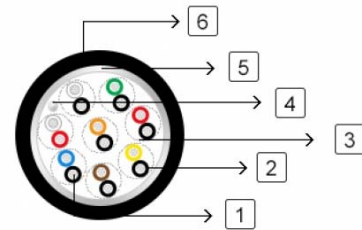

Applications	These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.		
Construction			
Conductor	Tinned copper wire.		
Insulation	Semi-Rigid PVC.		
Two cores twisted into pairs			
Overall Screen	Aluminium/Polyester tap.		
Drain Wire	Tinned copper wire.		
Sheath	PVC (V type)/LSZH (H type).		
Insulation Colour	Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/ Brown, Black/Orange, Red/White.		
Electrical & Mechanical Characteristics			
AWG			24
Conductor Construction			7x0.2
UL Style			2464
Maximum Conductor Resistance	Ω /km		85
Voltage Rating	V		300
Nominal Capacitance Conductor to Conductor	pF/m		98
Nominal Capacitance Conductor to Screen	pF/m		164
Bending Radius			10xOverall Diameter

Operating Temperature

°C

-30~80

Dimensions

Part No.	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 9508V	8	0.25	0.89	8.2
UEBE 9508H	8	0.25	0.89	8.2