


**Multipair Overall Screened Cables-Belden  
Equivalent 9515**

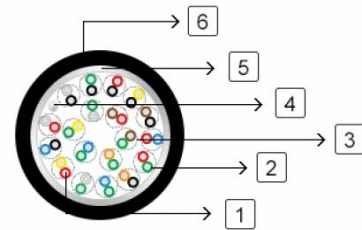

**Applications** These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

**Construction**

**Conductor** Tinned copper wire.

**Insulation** Semi-Rigid PVC.

**Two cores twisted into pairs**

**Overall Screen** Aluminium/Polyester tap.

**Drain Wire** Tinned copper wire.

**Sheath** PVC (V type)/LSZH (H type).

**Insulation Colour** Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue.

**Electrical & Mechanical Characteristics**

**AWG** 24

**Conductor Construction** 7x0.2

**UL Style** 2464

**Maximum Conductor Resistance** Ω/km 85

**Voltage Rating** V 300

**Nominal Capacitance Conductor to Conductor** pF/m 98

**Nominal Capacitance Conductor to Screen** pF/m 164

**Bending Radius** 10xOverall Diameter

**Operating Temperature**

°C

-30~80

**Dimensions**

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 9515V	15	0.25	1.02	10.6
UEBE 9515H	15	0.25	1.02	10.6