


**Multipair Overall Screened Cables-Belden
Equivalent 9519**

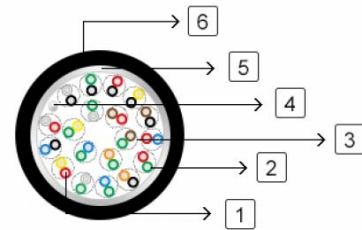

Applications	These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.
---------------------	--

Construction

Conductor	Tinned copper wire.
------------------	---------------------

Insulation	Semi-Rigid PVC.
-------------------	-----------------

Two cores twisted into pairs

Overall Screen	Aluminium/Polyester tap.
-----------------------	--------------------------

Drain Wire	Tinned copper wire.
-------------------	---------------------

Sheath	PVC (V type)/LSZH (H type).
---------------	-----------------------------

Insulation Colour	Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue, Green/Yellow, Green/Brown, Green/Orange, White/Blue.
--------------------------	--

Electrical & Mechanical Characteristics

AWG	24
------------	----

Conductor Construction	7x0.2
-------------------------------	-------

UL Style	2464
-----------------	------

Maximum Conductor Resistance	Ω/km	85
-------------------------------------	------	----

Voltage Rating	V	300
-----------------------	---	-----

Nominal Capacitance Conductor to Conductor	pF/m	98
---	------	----

Nominal Capacitance Conductor to Screen	pF/m	164
--	------	-----

Bending Radius	10xOverall Diameter
-----------------------	---------------------

Operating Temperature

°C

-30~80

Dimensions

Part No.	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 9519V	19	0.25	1.02	11.4
UEBE 9519H	19	0.25	1.02	11.4