


**Multipair Overall Screened Cables-Belden
Equivalent 9319**

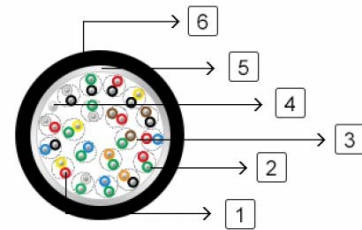

Applications These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

Construction

Conductor Tinned copper wire.

Insulation PVC

Two cores twisted into pairs.

Drain Wire Tinned copper wire.

Overall Screen Aluminium/Polyester tape.

Sheath PVC (V type)/LSZH (H type).

Insulation Colour Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue, Green/Yellow, Green/Brown, Green/Orange, White/Blue.

Electrical & Mechanical Characteristics

AWG 22

Conductor Construction Solid

UL Style 2464

Maximum Conductor Resistance Ω/km 54.8

Voltage Rating V 300

Nominal Capacitance Conductor to Conductor pF/m 115

Nominal Capacitance Conductor to Screen pF/m 164

Bending Radius 10xOverall Diameter

Operating Temperature

°C

-20~80

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 9319V	19	0.33	1.02	12.6
UEBE 9319H	19	0.33	1.02	12.6