


**Multipair Overall Screened Cables-Belden  
Equivalent 9327**

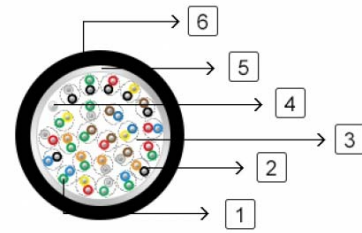

<b>Applications</b>	These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.
---------------------	--

**Construction**

<b>Conductor</b>	Tinned copper wire.
------------------	---------------------

<b>Insulation</b>	PVC
-------------------	-----

**Two cores twisted into pairs.**

<b>Drain Wire</b>	Tinned copper wire.
-------------------	---------------------

<b>Overall Screen</b>	Aluminium/Polyester tape.
-----------------------	---------------------------

<b>Sheath</b>	PVC (V type)/LSZH (H type).
---------------	-----------------------------

<b>Insulation Colour</b>	Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue, Green/Yellow, Green/Brown, Green/Orange, White/Blue, White/Yellow, White/Brown, White/Orange, Blue/Yellow, Blue/Brown, Blue/Orange, Brown/Yellow, Brown/Orange.
--------------------------	---

**Electrical & Mechanical Characteristics**

<b>AWG</b>	22
------------	----

<b>Conductor Construction</b>	Solid
-------------------------------	-------

<b>UL Style</b>	2464
-----------------	------

<b>Maximum Conductor Resistance</b>	Ω/km	54.8
-------------------------------------	------	------

<b>Voltage Rating</b>	V	300
-----------------------	---	-----

<b>Nominal Capacitance Conductor to Conductor</b>	pF/m	115
---	------	-----

<b>Nominal Capacitance Conductor to Screen</b>	pF/m	164
--	------	-----

<b>Bending Radius</b>	10xOverall Diameter
-----------------------	---------------------

**Operating Temperature**

°C

-20~80

**Dimensions**

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 9327V	27	0.33	1.14	15.6
UEBE 9327H	27	0.33	1.14	15.6