


**Multipair Individually Screened Cables-
Belden Equivalent 8765**

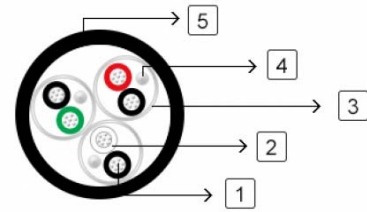

Applications	These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG solid tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.		
Construction			
Conductor	Tinned copper wire.		
Insulation	PVC		
Individual Screen	Aluminium/Polyester tape.		
Drain Wire	Solid tinned copper wire.		
Sheath	PVC (V type)/LSZH (H type).		
Insulation Colour	Red & Black, Green & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow.		
Electrical & Mechanical Characteristics			
AWG			22
Conductor Construction			Solid
UL Style			2464
Maximum Conductor Resistance	Ω/km		54.8
Voltage Rating	V		300
Nominal Capacitance Conductor to Conductor	pF/m		131
Nominal Capacitance Conductor to Screen	pF/m		253
Bending Radius			10xOverall Diameter
Operating Temperature	$^{\circ}\text{C}$		-20~80

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 8765V	11	0.33	1.02	11.9
UEBE 8765H	11	0.33	1.02	11.9