


**Multipair Individually Screened Cables-
Belden Equivalent 8773**

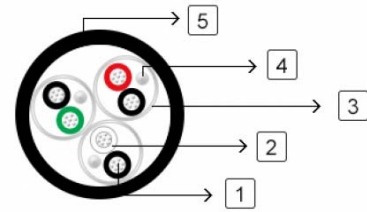

Applications	These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.	
Construction		
Conductor	Tinned copper wire.	
Insulation	PP	
Overall Screen	Aluminium/Polyester tape.	
Drain Wire	Tinned copper wire.	
Sheath	PVC (V type)/LSZH (H type).	
Insulation Colour	Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown, Green & Orange, White & Blue, White & Yellow, White & Brown, White & Orange, Blue & Yellow, Blue & Brown, Blue & Orange, Brown & Yellow, Brown & Orange.	
Electrical & Mechanical Characteristics		
AWG		22
Conductor Construction		7x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter

Operating Temperature

°C

-20~80

Dimensions

Part No.	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 8773V	27	0.25	1.52	17.9
UEBE 8773H	27	0.25	1.52	17.9