


**Multicore Unscreened Armoured Cables-  
Belden Equivalent 26514**

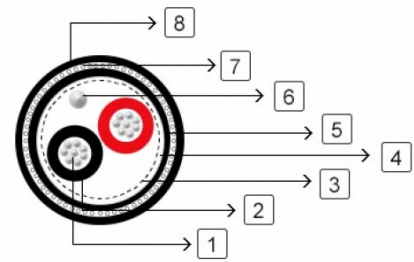

<b>Applications</b>	These multipair overall screened armoured cables provide excellent protections. They are ACIC armoured cables, used as instrumentation cables.
<b>Construction</b>	
<b>Conductor</b>	Bare copper wire.
<b>Insulation</b>	XLPE.
<b>Two cores twisted into pairs.</b>	
<b>Overall Screen</b>	Aluminium/ Polyester tape.
<b>Drain Wire</b>	20 AWG (7X28) tinned copper wire.
<b>Inner Sheath</b>	FR PVC.
<b>Armour</b>	Steel wire armour
<b>Outer Sheath</b>	FR PVC
<b>Insulation Colour</b>	Black, Red. Other colours are available upon your request.

**Electrical & Mechanical Characteristics**

<b>AWG</b>		18
<b>Conductor Construction</b>		7x26
<b>Maximum Conductor Resistance@20°C</b>	Ω/km	22
<b>Nominal Outer Shield DC Resistance @ 20°C</b>	Ω/km	33
<b>Voltage Rating</b>	V	300
<b>Bending Radius</b>		12xOverall Diameter
<b>Operating Temperature</b>	°C	40~90

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 26514V SWA	1	0.7	1.5	12.64±1