


M17/74 - RG 213 (RG 213/U)

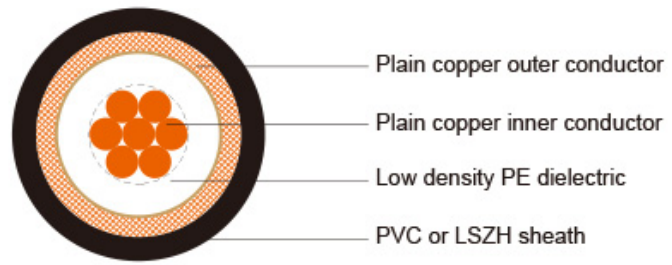

Construction

Inner conductor	Plain copper	7 x 0.75 mm
Dielectric	Low density PE	$\Phi 7.25 \pm 0.18$ mm
Outer conductor (shield)	Plain copper	144 x 0.16 mm
Shield coverage		97%
Sheath	PVC or LSZH	$\Phi 10.3 \pm 0.18$ mm

Electrical & Mechanical Characteristics

Impedance	53 \pm 3 Ohm ₀
Nominal capacitance	100pF/m
Velocity of propagation	66%
Insulation resistance	>2000 Mohm.Km
Inner conductor resistance	6.0 Ohm/Km
Outer conductor resistance	4.5 Ohm/Km
Operating temperature range	-30 °C - +70 °C
Test/Operatig Voltage(max)	10KV/5KV
Copper Weight	76.9 Kg/Km
Cable weight (approx.)	163 Kg/Km
Screening effectiveness	100-900 MHz >55dB

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100ft)
50	4.5	1.37
100	6.7	2.04

200	9.9	3.02
400	14.3	4.36
500	16.1	4.91
600	17.8	5.43
860	22.1	6.74
1000	24.3	7.41

Return Loss

30-300 MHz	>31dB
300-600 MHz	>28dB
600-900 MHz	>27dB