


RG 59 CS1

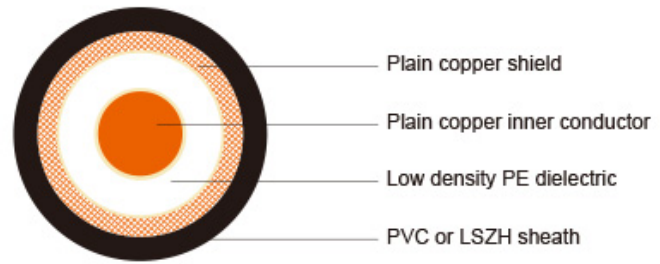

Construction

Inner conductor	Copper clad steel(CCS)	0.58 mm
Dielectric	Low density PE	$\Phi 3.70 \pm 0.10$ mm
Outer conductor(shield)	Plain copper	180 x 0.10 mm
Shield coverage		94%
Sheath	PVC or LSZH	$\Phi 6.15 \pm 0.10$ mm

Electrical & Mechanical Characteristics

Impedance	75 \pm 5 Ohm
Nominal capacitance	67pF/m
Velocity of propagation	66%
Insulation resistance	>2000 Mohm.Km
Inner conductor resistance	158 Ohm/Km
Outer conductor resistance	11.0 Ohm/Km
Operating temperature range	-30 °C - +70 °C
Copper weight	15.5 Kg/Km
Cable weight (approx.)	50.9 Kg/Km
Screening effectiveness	>55 dB

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100ft)
100	10.7	3.26
200	15.7	4.79
400	22.7	6.92
500	25.7	7.84

600	28.7	8.75
860	34.8	10.61
1000	38.1	11.63

Return Loss

30-300 MHz	>31dB
300-600 MHz	>28dB
600-900 MHz	>24dB