


Fire resistant RG6 A/U Coaxial cables

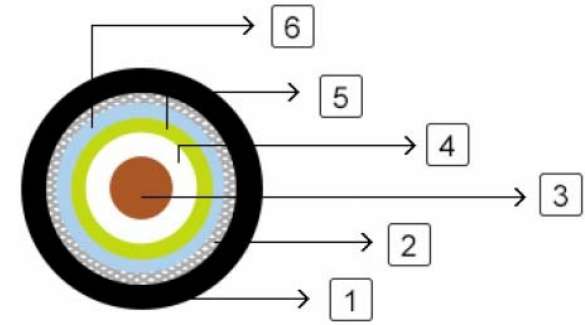

RG6 A/U FR

Application:	The cables are designed for CCTV, security, smoke detection and evacuation monitoring applications, where continued functionality is required during a fire situation. Due to the zero halogen low smoke construction, this cable is ideal for use in public, commercial and industrial environments.
STANDARDS:	Basic design to MIL-C-17
VOLTAGE RATING:	60V
FIRE PERFORMANCE	
Circuit Integrity	IEC 60331-23; BS 6387 CWZ; DIN VDE 0472-814(IE180); CEI 20-36/2-1; SS229-1; NBN C 30-004 (cat. F3); NF C32-070-2.3(CR1)
System circuit integrity	DIN 4102-12, E30 depending on lay system
Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454

Note: Asterisk * denotes superseded standard.

CABLE CONSTRUCTION

Conductors: Bare copper copper wire, solid according to IEC(EN) 60228 class 1.
 Insulation: Foamed PE wrapped with fire resistant silicone rubber compound type EI2 as per BS 7655-1.1 or fluoropolymer(FEP) compound.
 Binder: Glass tape
 Overall Screen: AL foil(100%)+AL braid (70%)
 Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.)

Physical AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C - +70°C
 Temperature range during installation (mobile state): -5°C - +60°C
 Minimum bending radius: 8 x Overall Diameter

Electrical Properties

Impedance	75±5Ω
Capacitance	54 nF/km
Velocity ratio(%)	82
Insulation resistance	>5000 Mohm.Km
Shield coverage	AL foil(100%)+AL 70%
DC resistance	
Inner conductor	23.1 Ω/km

Outer conductor

31 Ω/km

Attenuation

Frequency(MHz)	Attenuation (dB/100 m)	Attenuation (dB/100ft)
50	5.0	1.5
100	6.4	1.96
200	9.2	2.8
500	14.5	4.4
600	15.9	4.9
800	17.7	5.4
1000	21.9	6.7
1350	24.9	7.6
1750	29.0	8.8
2050	33.1	10.1
2400	36.4	11.1

Return Loss

Frequency(MHz)	Return Loss (dB)
30-300	>28dB
300-600	>24dB
600-900	>22dB

CONSTRUCTION PARAMETERS

Cable Code	Conductor Diameter	Nominal Insulation Diameter	Nominal Screen No.x Diameter	Nominal Overall Diameter	Approx. Weight
	mm	mm	No. x mm	mm	kg/km
RG6 A/U FR	1.02	4.57 ± 0.20	96 x 0.12	7.00 ± 0.20	81.6