


**Fire Resistant Tight Buffered Distribution
Fiber Optic cables**

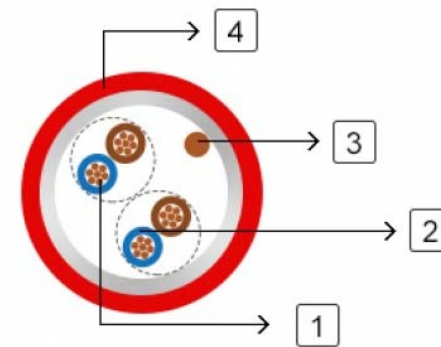

MTA-B-C-D-H-FR

Application: This cables are used for interconnection of distribution boxes and end devices, where continued functionality is required during a fire situation. The cables are very suitable for various indoor and outdoor applications, including routing between buildings within ducts and inside building up to riser shafts.

STANDARDS: Basic design to Telcordia GR409-CORE / TIA/EIA 568B.3 / ICEA-S-83-596

VOLTAGE RATING: 60V

FIRE PERFORMANCE

Circuit Integrity	IEC 60331-25; BS 6387 CWZ; DIN VDE 0472-814(IE180); CEI 20-36/2-1; SS229-1; NBN C 30-004 (cat. F3); NF C32-070-2.3(CR1)
System circuit integrity	DIN 4102-12, E30 depending on lay system
Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454

Note: Asterisk * denotes superseded standard.

CABLE CONSTRUCTION

Optical fibers: Singlemode and multimode tight fibers, with tight buffer coating.

Fire Barrier: The tight buffered fibers are wrapped with fire blocking fiber glass yarns.

Inner Sheath(optional): Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1

Ripcord(optional): An optional ripcord can be located under the outer sheath to facilitate jacket remove

Armouring(optional):

STA: Corrugated steel tape armour

SWB: Steel wire braid

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.)

Physical AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -20°C - +60°C

Temperature range during installation (mobile state): 0°C - +50°C

Minimum bending radius: 10 times the outer diameter for unarmoured cables

20 times the outer diameter for armoured cables

CONSTRUCTION PARAMETERS

Cable Code	N° of Fibers	Nominal Overall Diameter	Max Tensile Strength	Minimum Bending Radius	Approx. Weight
		mm	N	mm	kg/km
MTA-B-2-0-H-FR	2	7,6	250	76	55
MTA-B-4-0-H-FR	4	7,8	250	78	67
MTA-B-6-0-H-FR	6	8,6	400	86	77
MTA-B-8-0-H-FR	8	8,8	400	88	81
MTA-B-12-0-H-FR	12	9,3	400	93	90