


600/1000V XLPE Insulated PVC Sheathed Double steel tape armoured Power Cables 2 Cores

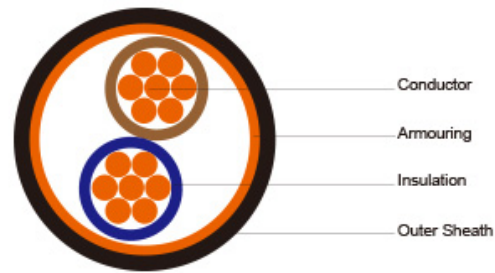

CU/XLPE/PVC/DSTA/PVC 600/1000V Class 2

Application:

The cables are mainly used in power stations, mass transit underground passenger systems, airports, petrochemical plants, hotels, hospitals, and high-rise buildings.

STANDARDS:

Basic design adapted to IEC 60502-1

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)**

EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*

Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)**

EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4

Note: Asterisk ** denotes that the standard compliance is optional, depending on the oxygen index of the PVC compound and the cable design.

VOLTAGE RATING

600/1000V

CABLE CONSTRUCTION

Conductor: Plain annealed copper wire, normal stranded or compact stranded according to IEC(EN) 60228 class 2.

Insulation: Extruded cross-linked XLPE compound.

Filler, binder and inner covering: PP, PET, PVC

Armouring: Double steel tape

Outer Sheath: Thermoplastic PVC compound. UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option. Compliance to fire performance standard (IEC 60332-1, IEC 60332-3, UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

COLOUR CODE

Insulation Colour as per BS7671

	With Earth Conductor	Without Earth Conductor
2Cores	-	Brown, Blue
3Cores	Yellow/Green, Brown, Blue	Brown, Gray, Black
4Cores	Yellow/Green, Brown, Gray, Black	Brown, Gray, Black, Blue
5Cores	Yellow/Green, Brown, Gray, Black, Blue	Brown, Gray, Black, Blue, Black
Above 5 Cores	Yellow/Green, Black Numbered	Black Numbered

Sheath Colour: Black (other colors upon request)

Physical AND THERMAL PROPERTIES

Temperature range during operation: Max.90°C for XLPE

250°C in short-circuit for 5secs max.

Minimum bending radius: 10x Overall Diameter

CONSTRUCTION PARAMETERS

Conductor									
No. of Core Cross Section	No./ Nominal Diameter of Strands	Diameter Overall Conductor	Nominal Insulation Thickness	Steel Tape Thickness	Nominal Sheath Thickness	Nominal Overall Diameter	Max.DC resistance of conductor @20°C	Approx. Weight	
mm ²	No/mm	mm	mm	mm	mm	mm	Ω/km	Kg/km	
2x6	7/1.04	2.90	0.7	0.2	1.8	16.8	3.08	417	
2x10	7/1.35	3.75	0.7	0.2	1.8	18.5	1.83	539	
2x16	7/1.70	4.75	0.7	0.2	1.8	20.5	1.15	704	
2x25	7/2.14	5.85	0.9	0.2	1.8	23.5	0.727	971	
2x35	7/2.52	6.90	0.9	0.2	1.8	25.6	0.524	1,216	
2x50	19/1.78	8.15	1.0	0.2	1.8	28.5	0.387	1,582	
2x70	19/2.14	9.75	1.1	0.2	1.9	32.3	0.268	2081	
2x95	19/2.52	11.45	1.1	0.2	2.0	36.4	0.193	2749	
2x120	37/2.03	12.85	1.2	0.5	2.2	41.1	0.153	3,727	
2x150	37/2.25	14.30	1.4	0.5	2.3	45.1	0.124	4,509	
2x185	37/2.52	15.95	1.6	0.5	2.5	49.9	0.0991	5,523	
2x240	61/2.25	18.25	1.7	0.5	2.6	55.3	0.0754	6981	
2x300	61/2.52	20.40	1.8	0.5	2.8	60.7	0.0601	8,383	
2x400	61/2.85	23.35	2.0	0.5	3.0	67.9	0.0470	10,897	

Electrical Properties

Conductor Operating Temperature : 90°C

Ambient Temperature : 30°C

Current-Carrying Capacities (Amp)

Conductor crosssectional area	Reference Method 1 (clipped direct)		Reference Method 11 (on a perforated horizontal cable tray Reference Method 13 [free air])		In single-way ducts		Laid direct in ground	
	one core cable single phase a.c. or d.c.	2- core or 3- core cable 3- phase a.c.	one core cable single phase a.c. or d.c.	2- core or 3- core cable 3- phase a.c.	one core cable single phase a.c. or d.c.	2- core or 3- core cable 3- phase a.c.	one core cable single phase a.c. or d.c.	2- core or 3- core cable 3- phase a.c.
1	2	3	4	5	6	7	8	9

mm2	A	A	A	A	A	A	A	A
6	62	53	66	56	-	50	-	60
10	85	73	90	78	-	65	-	80
16	110	94	115	99	115	94	140	115
25	146	124	152	131	145	125	180	150
35	180	154	188	162	175	150	215	180
50	219	187	228	197	210	175	255	215
70	279	238	291	251	260	215	315	265
95	338	289	354	304	310	260	380	315
120	392	335	410	353	355	300	430	360
150	451	386	472	406	400	335	480	405
185	515	441	539	463	455	380	540	460
240	607	520	636	546	520	440	630	530
300	698	599	732	628	590	495	700	590
400	787	673	847	728	660	560	790	670

Voltage Drop (Per Amp Per Meter)

Conductor cross-sectional area	2-core cable d.c.	2 cables, single-phase a.c.			3 or 4 cables, 3-phase a.c.			2 cables, single-phase a.c.	3 or 4 cables, 3-phase a.c.
								In ducts or in ground	In ducts or in ground
1	2	3			4			5	6
mm2	mV/A/m	mV/A/m			mV/A/m			mV/A/m	mV/A/m
6	7.9	7.9			6.8			7.9	6.5
10	4.7	4.7			4.0			4.7	3.9
16	2.9	2.9			2.5			2.9	2.6
		r	x	z	r	x	z		
25	1.850	1.350	0.160	1.900	1.600	0.140	1.650	1.900	1.600
35	1.350	1.350	0.155	1.350	1.150	0.135	1.150	1.350	1.200
50	0.980	0.990	0.155	1.000	0.860	0.135	0.870	1.000	0.870
70	0.670	0.670	0.150	0.690	0.590	0.130	0.600	0.690	0.610
95	0.490	0.500	0.150	0.520	0.430	0.130	0.450	0.520	0.450
120	0.390	0.400	0.145	0.420	0.340	0.130	0.370	0.420	0.360
150	0.310	0.320	0.145	0.350	0.280	0.125	0.300	0.350	0.300
185	0.250	0.260	0.145	0.290	0.220	0.125	0.260	0.290	0.250
240	0.195	0.200	0.140	0.240	0.175	0.125	0.210	0.240	0.210
300	0.155	0.160	0.140	0.210	0.140	0.120	0.185	0.210	0.190
400	0.120	0.130	0.140	0.190	0.115	0.120	0.165	0.190	0.180

