


Twisted Single Pair PFA Insulated

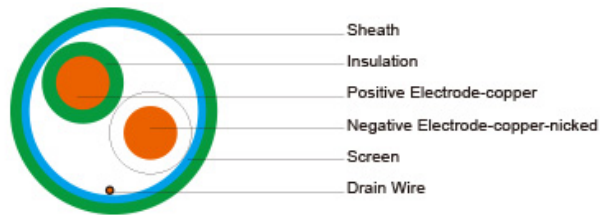

Application:	These cables are used with thermocouples for temperature measurements.
Conductor:	Solid. Material is according to thermocouple type.
Insulation:	PFA polymer
Screen:	Aluminum tape
Drain wire:	Tinned copper
Outer sheath:	PFA polymer
Construction:	Round
Color code:	According to IEC 60584-3

K Type

	Insulation Material	Screen Material	Sheath Material	Max. Temp. (°C)	Nominal (mm)	O.D.	Weight (kg/km)
24 (0.51)	PFA Polymer	Aluminum tape	PFA Polymer	260	2.7		13.4
24 (7/0.2)	PFA Polymer	Aluminum tape	PFA Polymer	260	2.9		13.8
20 (0.81)	PFA Polymer	Aluminum tape	PFA Polymer	260	3.7		30.0
20 (7/0.32)	PFA Polymer	Aluminum tape	PFA Polymer	260	3.8		30.3