


Multipair Individual/Overall Screen

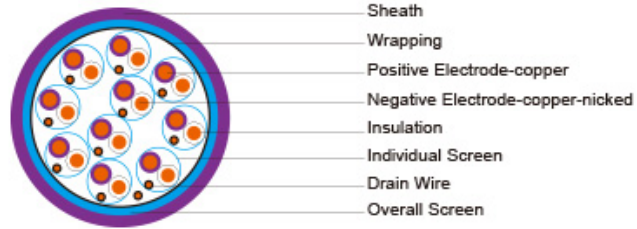

<b>Application:</b>	These cables are used in thermocouple circuits, petrochemical plants, utilities and industrial plants.
<b>Conductor:</b>	Solid
<b>Type applicable:</b>	KX, EX, JX, TX, NX, KCA, KCB, RCA, RCB, SCA, RCB, BC
<b>Insulation:</b>	PVC, PE, XLPE or LSZH thermoplastic material
<b>Individual screen:</b>	24 µm aluminium / PETP tape over solid tinned copper drain wire, 0.6 mm
<b>Wrapping:</b>	At least 1 layer of plastic tape
<b>Overall screen:</b>	24 µm aluminium / PETP tape over 7-stranded tinned copper drain wire, 0.5 mm <sup>2</sup>
<b>Outer sheath:</b>	PVC or LSZH thermoplastic material
<b>Color code:</b>	According to IEC 60584-3
<b>Flame retardancy:</b>	IEC 60332-1
<b>Flame propagation:</b>	IEC 60332 cat. C
<b>Temperature range:</b>	-30°C up to 70°C during operation. -5°C up to 50°C during installation.

0.5 mm<sup>2</sup>

Conductor Size (mm <sup>2</sup> )	No. of Pairs	Insulation Thickness (mm)	Outer Sheath Thickness (mm)	Nominal O.D. (mm)	Weight* (kg/km)
0.5	2	0.4	1.0	9.1	83
0.5	4	0.4	1.0	10.4	132
0.5	6	0.4	1.2	12.8	196
0.5	8	0.4	1.2	13.6	244
0.5	10	0.4	1.2	15.3	300
0.5	12	0.4	1.2	16.0	346
0.5	16	0.4	1.4	18.5	459
0.5	20	0.4	1.4	20.3	555
0.5	24	0.4	1.4	21.9	659

0.8 mm<sup>2</sup>

Conductor Size (mm <sup>2</sup> )	No. of Pairs	Insulation Thickness (mm)	Outer Sheath Thickness (mm)	Nominal O.D. (mm)	Weight* (kg/km)
0.8	2	0.4	1.0	9.8	102
0.8	4	0.4	1.0	11.3	167
0.8	6	0.4	1.2	13.9	247
0.8	8	0.4	1.2	14.7	312
0.8	10	0.4	1.2	16.7	384
0.8	12	0.4	1.4	17.9	462
0.8	16	0.4	1.4	20.1	591
0.8	20	0.4	1.4	22.1	718
0.8	24	0.4	1.6	24.4	878

**1.0 mm<sup>2</sup>**

Conductor Size (mm <sup>2</sup> )	No. of Pairs	Insulation Thickness (mm)	Outer Sheath Thickness (mm)	Nominal O.D. (mm)	Weight* (kg/km)
1.0	2	0.4	1.0	10.2	114
1.0	4	0.4	1.0	11.7	189
1.0	6	0.4	1.2	14.4	281
1.0	8	0.4	1.2	15.3	355
1.0	10	0.4	1.2	17.4	439
1.0	12	0.4	1.4	18.6	527
1.0	16	0.4	1.4	21.0	677
1.0	20	0.4	1.6	23.5	846
1.0	24	0.4	1.6	25.5	1006

**1.3 mm<sup>2</sup>**

Conductor Size (mm <sup>2</sup> )	No. of Pairs	Insulation Thickness (mm)	Outer Sheath Thickness (mm)	Nominal O.D. (mm)	Weight* (kg/km)
1.3	2	0.4	1.0	11.5	131
1.3	4	0.4	1.2	13.8	234
1.3	6	0.4	1.2	16.5	330
1.3	8	0.4	1.2	17.6	420
1.3	10	0.4	1.4	20.4	537
1.3	12	0.4	1.4	21.3	624
1.3	16	0.4	1.4	24.1	804
1.3	20	0.4	1.6	27.1	1004
1.3	24	0.4	1.6	29.3	1196

**1.5 mm<sup>2</sup>**

Conductor Size (mm <sup>2</sup> )	No. of Pairs	Insulation Thickness (mm)	Outer Sheath Thickness (mm)	Nominal O.D. (mm)	Weight* (kg/km)
-----------------------------------	--------------	---------------------------	-----------------------------	-------------------	-----------------

1.5	2	0.5	1.0	12.6	151
1.5	4	0.5	1.2	15.1	270
1.5	6	0.5	1.2	18.1	382
1.5	8	0.5	1.4	19.7	504
1.5	10	0.5	1.4	22.4	623
1.5	12	0.5	1.4	23.5	724
1.5	16	0.5	1.6	27.1	958
1.5	20	0.5	1.6	29.9	1168
1.5	24	0.5	1.6	32.8	1392

\*The number here is just approx. weight. It changes according to the insulation material and the conductor used in different type of extension cable and compensating cable.