

Instrumentation Cable

Multi Triples, Individual&Collective Screen, PVC Sheathed


EN50288-7

500 V

Application

Suitable for connecting instruments and control systems for analogue or digital signal transmission. Recommended for indoor and outdoor installation, on racks, trays, in conduits, in dry and wet locations

Construction

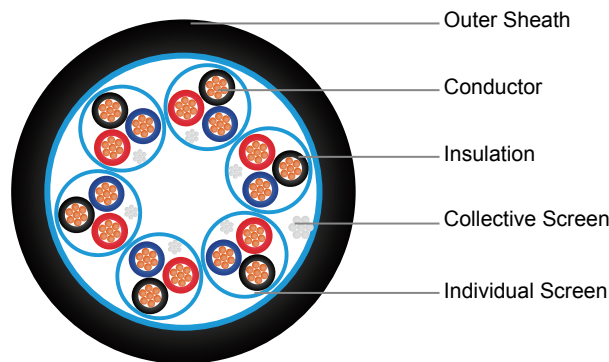

- Conductor: Solid, stranded or flexible plain or metal coated copper in accordance with class 1, 2 or 5 of HD383 in the range of 0.5mm² to 2.5mm².
- Insulation: PE, PVC or XLPE to EN 50290. Suitable alternative materials are under consideration.
- Triples Identification: Black&White&Red color with number on the cores for multi pairs, start with 1 in the centre.
- Individual Screen: Aluminium foil tape over a tinned copper drain wire.
- Wrapping: At least 1 layer of plastic tape.
- Collective Screen: Aluminium foil tape over a tinned copper drain wire.
- Outer Sheath: Polyvinyl chloride PVC, to EN 50290-2-22.

Electrical data at 20°C

	Character	Unit	Values			
			0.5	0.75	1.0	1.5
Conductor size	nom.	mm ²	0.5	0.75	1.0	1.5
Conductor resistance	max.	Ω/km	36.7	25.0	18.5	12.3
Insulation resistance						
PVC Insulation	min.	MΩ x km	100			
PE/XLPE Insulation	min.	MΩ x km	5000			
L/R (ratio)	max.	μH/Ω	25			40
Inductance	max.	mH/km	1			
Mutual capacitance						
PVC Insulation	max.	nF/m	160			170
PE/XLPE Insulation	max.	nF/m	100			100
Capacitance unbalance	max.	pF/500 m	500			
Test voltage		V	2000			
Operating voltage U ₀ / U	max.	V	500			