


FLR2X11Y

Application:

Electrical parking brake, Anti-Lock Brake system, Wheel speed sensor.

Standards/Specification:

ISO6722

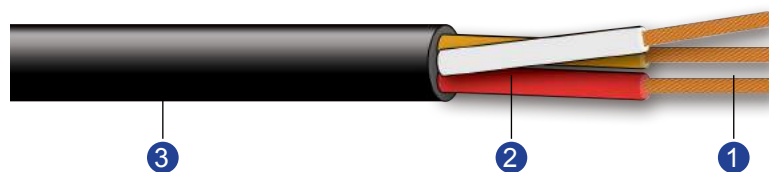

Construction:

- 1 Conductor: Soft-annealed electrolytic tinned copper Cu-ETP1 according to DIN EN 13602, bare conductor construction according to ISO 6722.
- 2 Insulation: Irradiation cross linked PE
- 3 Sheath: Polyurethane(PUR)

Product Features:

Voltage rating: 60 V d.c, 25 V a.c.

Temperature range: -40 °C to +125 °C (3000 h)



Technical Data:

Nominal Cross-Section (mm ²)	Strand No./Max. Diameter (N/mm)	Diameter of Conductor (mm)	Nominal Insulation Thickness (mm)	Min. Sheath Thickness (mm)	Nominal Overall Diameter (mm)	Weight Approx. (kg/km)
2×0.5	19/0.19	1.0	0.28	0.75	5.0	32
2×0.6	19/0.21	1.1	0.28	0.5	4.4	31
3×0.6	19/0.21	1.1	0.28	0.5	5.0	38